


Automobility Vehicle Documentation Form AM-310-B
Vehicle Information Data:


Make MAZDA Model 6 Year 2009/2010

Hand Control Model # 21221



- Notes: — RIGHT OFFSET LOWER BRAKE ARM
 — TILT STEERING TO FULL UPRIGHT POSITION AND OUT $\frac{1}{2}$ " FROM DASH.
 — CAMLOCKS AGAINST THE DASH ON LOWER LEFT + RIGHT SIDES.
 — PLACE A PENNY BETWEEN THROTTLE BLOCK SET SCREW AND PLASTIC ACCELERATOR ARM WHEN TIGHTENING.

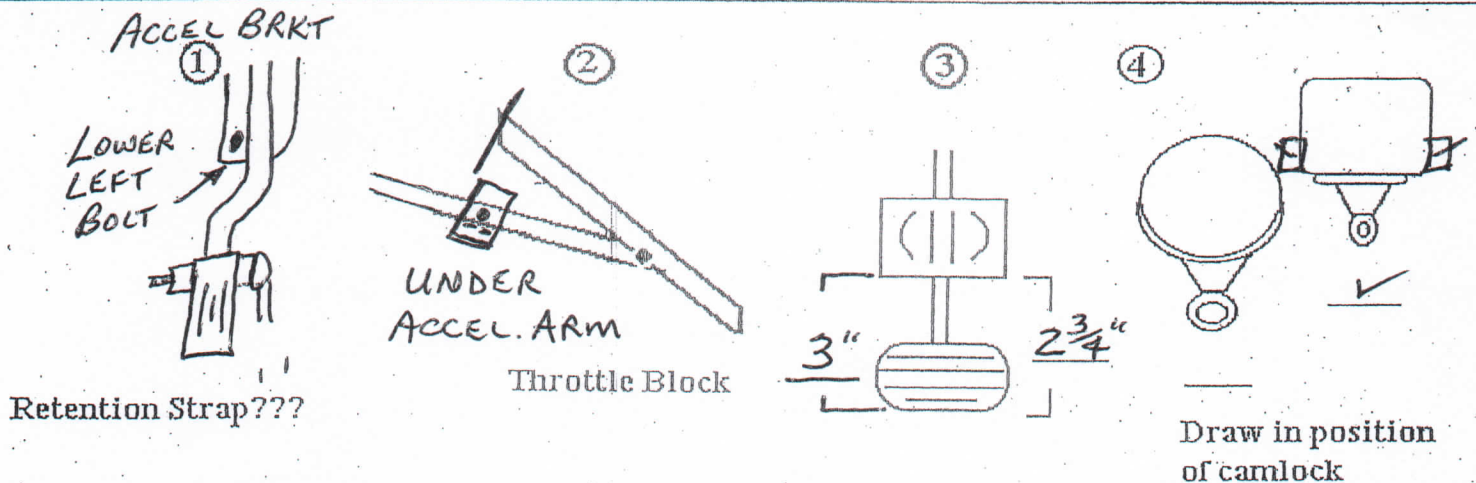

Enter measurements
in blanks.

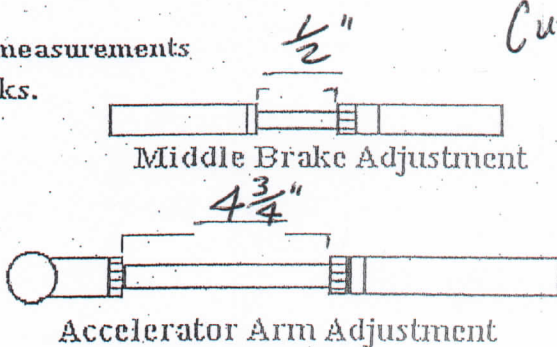


CUT THROTTLE
BLOCK

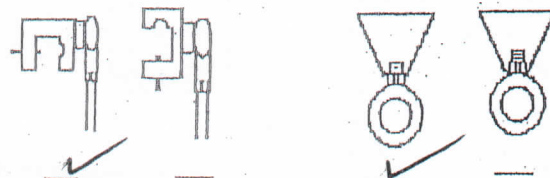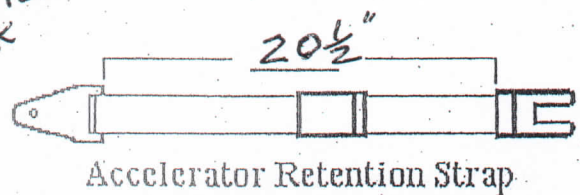


Automobility Vehicle Documentation Form AM-310-B
Vehicle Information Data:

Make MAZDA Model 3 HATCH/SEDAN Year 2010
(NEW STYLE)
Hand Control Model # 21221


- Notes: — RIGHT OFFSET LOWER BRAKE ARM
— TILT STEERING TO FULL UPRIGHT POSITION AND 1" OUT FROM DASH.
— CAMLOCKS ON TOP AND AGAINST THE DASH.
— PLACE A PENNY BETWEEN THROTTLE BLOCK SETSCREW AND PLASTIC ACCELERATOR ARM WHEN TIGHTENING.
— EXTRA RUBBER PAD FOLDED 3 TIMES TO FILL IN SPACE OF TILT ARM UNDER STEERING COLUMN AND THE TOWER.

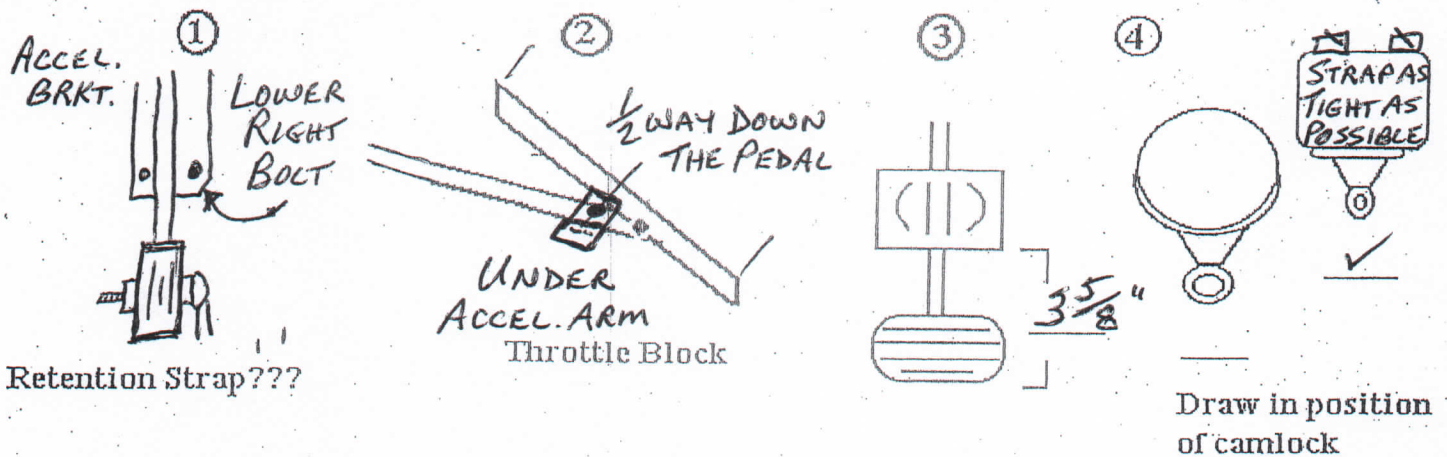

Enter measurements in blanks.

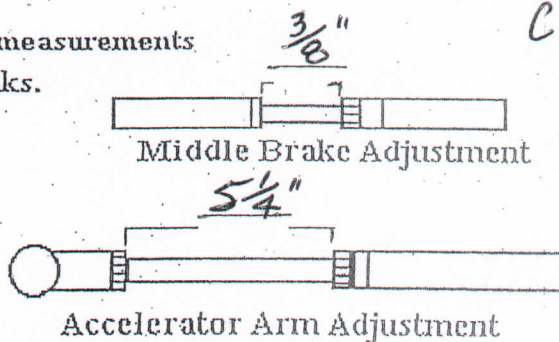

CUT THROTTLE BLOCK

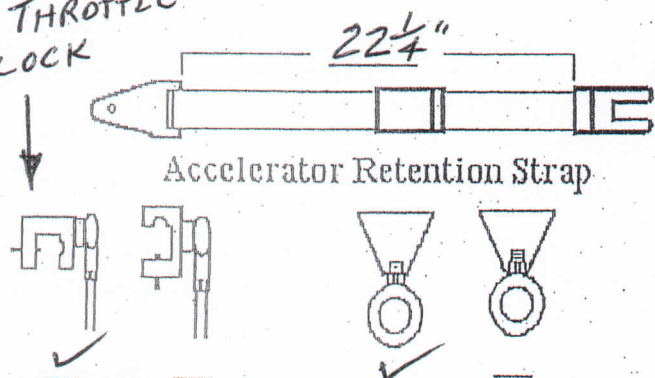

Automobility Vehicle Documentation Form AM-310-B
Vehicle Information Data:

Make MAZDA Model 5 (MINI VAN) Year 2009
Hand Control Model # _____ (No-INSTALL)

Notes:


- X WIDE OFFSET SLOT UNDER STEERING COLUMN
- X BOLSTER PAD TOO LOW
- X ACCEL PEDAL SET IN BEHIND A VERY WIDE CENTRE CONSOLE.

①



②

③

④

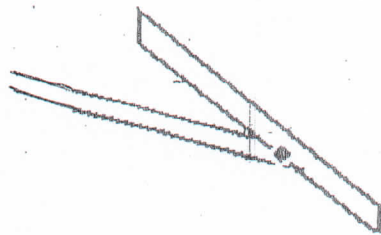

Throttle Block

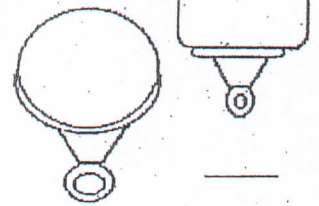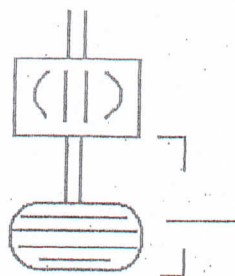

Draw in position of camlock

Retention Strap???


Enter measurements
in blanks.





Middle Brake Adjustment



Accelerator Retention Strap



Accelerator Arm Adjustment




Automobility Vehicle Documentation Form AM-310-B Vehicle Information Data:

Make MAZDA Model CX-7 Year 2009

Hand Control Model # 21221

Notes:

- RIGHT OFFSET LOWER BRAKE ARM
- TILT STEERING TO FULL UPRIGHT POSITION
- CAMLOCKS ON LEFT + RIGHT SIDES ARE AGAINST THE DASH.
- PLACE A PENNY BETWEEN THROTTLE BLOCK SET SCREW AND ACCELERATOR ARM FOR STABILITY WHEN TIGHTENING.

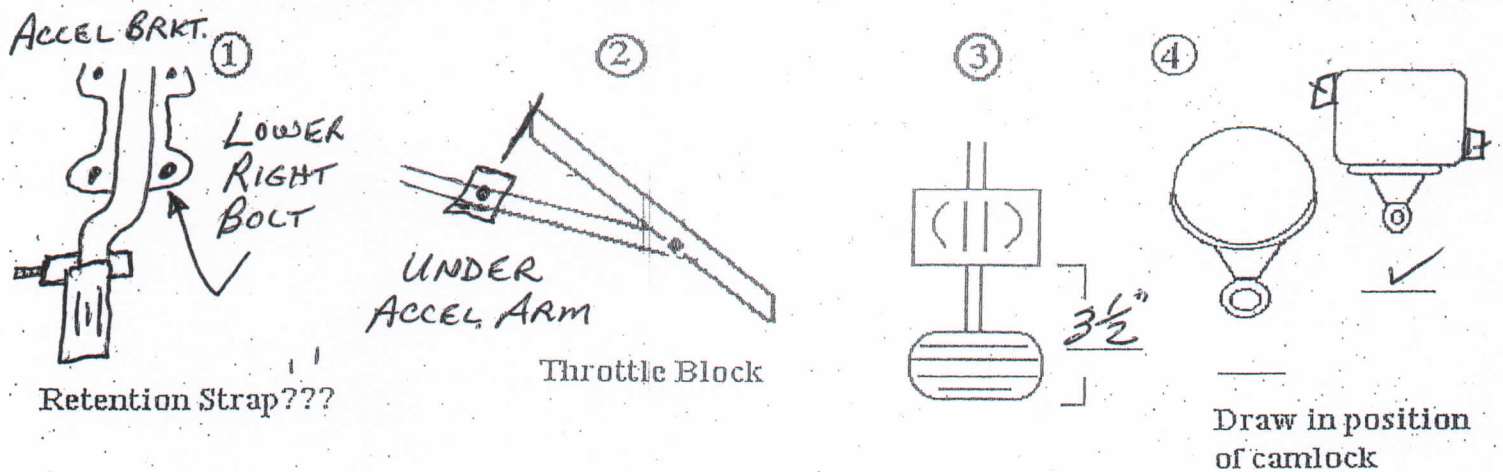

Enter measurements in blanks.

